

11/28/00



JCS97 U.S. PTO


APPLICATION FOR U.S. PATENT
TRANSMITTAL FORM

PATENT

Box Patent Application
THE COMMISSIONER OF PATENTS
AND TRADEMARKS
Washington, D.C. 20231
Sir:

Attorney Docket No. 066303.0163

066303 U.S. PTO
09/12/00



Transmitted herewith for filing is the patent application of:

Inventors: A. J. Paul Carew, et al.

For: SYSTEM AND METHOD FOR COMMUNICATING
TELECOMMUNICATION INFORMATION FROM A BROADBAND
NETWORK TO A TELECOMMUNICATION NETWORK

X Pursuant to 37 C.F.R. § 1.213(a), Applicant(s) respectfully requests that the above-identified patent application not be published under 37 U.S.C. § 122(b). Applicant(s) hereby certifies that the invention disclosed in the above-identified application has not been and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication at eighteen months after filing.

Enclosed are: Specification 50 pages
Declaration and Power of Attorney
Assignment and Assignment Recordation Form
Verified Statement Claiming Small Entity
Status
Formal Drawings 9 sheets

FEE CALCULATION					FEE
	Number		Number Extra	Rate	Basic Fee
Total Claims:	47	- 20 =	27	X \$9 =	\$ 355.00
Independent Claims	4	- 3 =	1	X \$40 =	\$ 40.00
TOTAL FILING FEE =					\$ 638.00

Enclosed is a check in the amount of \$638.00. Please charge any additional fees or credit any overpayment to Deposit Account No. 02-0384 of BAKER BOTTS L.L.P.

BAKER BOTTS L.L.P.
Attorneys for Applicants

November 28, 2000
Date

Jeffery D. Baxter
Jeffery D. Baxter
Registration No. 45,560

Applicant or Patentee: A. J. Paul Carew, et al.

Attorney's Docket No. 066303.0163

Serial or Patent No.

Filed or Issued:

Title: SYSTEM AND METHOD FOR COMMUNICATING TELECOMMUNICATION
INFORMATION FROM A BROADBAND NETWORK TO A TELECOMMUNICATION
NETWORK

**STATEMENT CLAIMING SMALL ENTITY STATUS
(37 CFR 1.9(f) & 1.27(c)) – SMALL BUSINESS CONCERN**

I hereby state that I am an official of the small business concern empowered to act on behalf of the concern identified below:

Name of Small Business Concern: General Bandwidth Inc.
Address of Small Business Concern: 12303-B Technology Blvd.
Austin, Texas 78727

I hereby state that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby state that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention, entitled SYSTEM AND METHOD FOR COMMUNICATING TELECOMMUNICATION INFORMATION FROM A BROADBAND NETWORK TO A TELECOMMUNICATION NETWORK by inventors A. J. Paul Crew and Brendon W. Mills, described in the specification filed herewith.

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights in the invention is listed below, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e):

NONE

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or my maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b)).

Name of Person Signing: Brendon W. Mills
Title of Person if other than owner: President and CEO
Address of Person Signing: 12303-B Technology Blvd.
Austin, Texas 78727

Signature:



Date:

11-20-00

SYSTEM AND METHOD FOR COMMUNICATING
TELECOMMUNICATION INFORMATION FROM A BROADBAND NETWORK
TO A TELECOMMUNICATION NETWORK

RELATED APPLICATIONS

This application is related to U.S. Application Serial No. _____, entitled
"SYSTEM AND METHOD FOR COMMUNICATING TELECOMMUNICATION
INFORMATION FROM A TELECOMMUNICATION NETWORK TO A
5 BROADBAND NETWORK" and filed _____, Attorney's Docket No.
066303.0111.

TECHNICAL FIELD OF THE INVENTION

10 This invention relates generally to the field of communications and, more
particularly, to a system and method for communicating telecommunication
information from a broadband network to a telecommunication network.

BACKGROUND OF THE INVENTION

The public switched telephone network (PSTN) is a circuit-switched network that uses dedicated lines to communicate telephone calls. At a central office, a digital Class 5 switch receives analog telephone signals from a user, digitizes the analog telephone signals, and then multiplexes the digital signals over a network of circuit-switched backbone transport lines. An interexchange carrier (IXC) transports the call to a destination Local Access Transport Area (LATA), where it is handed to a local service provider and reconverted to an analog signal for delivery to a second user.

As the Internet has driven demand for greater bandwidth over data networks, new broadband technologies have emerged that allow the delivery of telephone calls using data packets communicated over broadband networks. Unfortunately, current solutions have been technology dependent, supporting only a single architecture.

SUMMARY OF THE INVENTION

In accordance with the present invention, a system and method for communicating telecommunication information from a broadband network to a telecommunication network is provided that substantially eliminates or reduces disadvantages or problems associated with previously developed systems and methods.

In one embodiment, a gateway for communicating telecommunication information includes packetization modules and telecommunication interface modules. The packetization modules receive first data packets from a first broadband network using a first data communications protocol and extract first telecommunication information associated with a first subscriber from the first data packets. The packetization modules also receive second data packets from a second broadband network using a second data communication protocol and extract second telecommunication information associated with a second subscriber from the second data packets. The telecommunication interface modules communicate the first telecommunication information to a telecommunication network using a first telecommunication interface associated with the first subscriber and communicate the second telecommunication information to the telecommunication network using a second telecommunication interface associated with the second subscriber.

In another embodiment, a system for communicating telecommunication information includes a memory, a packetization module, and a telecommunication interface module. The memory stores subscriber profiles associating each of several subscribers with a telecommunication interface. The packetization module receive data packets from a broadband network and extract telecommunication information associated with a subscriber from the data packets using a data communication protocol associated with the subscriber. The telecommunication interface module communicates the telecommunication information to a telecommunication network using a telecommunication interface associated with the subscriber.

The present invention provides a number of important technical advantages. The present invention uses broadband networks to communicates telecommunication information between a telecommunication network and customer premises equipment.

Because digital subscriber line (DSL), cable, wireless, and other broadband platforms deliver greater bandwidth than traditional plain old telephone service (POTS), the present invention provides a more efficient means of communicating telecommunication information.

5 Rather than provide a single, technology-dependent solution, the present invention uses several, alternative telecommunication, compression, and broadband technologies to couple a telecommunication network to a broadband network. For example, the present invention may receive telecommunication information from a telecommunication network using different telecommunication interfaces and
10 compress the telecommunication information using various compression algorithms. In addition, the present invention may generate data packets encapsulating the telecommunication information according to several, alternative data communication protocols and then communicate the data packets to broadband networks using different data links. Because the present invention supports several, alternative
15 telecommunication, compression, and broadband technologies, it is compatible with many different DSL, cable, wireless, and other types of broadband platforms. As a result, telecommunication providers can deploy the present invention with greater flexibility and in a more cost-effective manner. For these and other readily apparent reasons, the present invention represents a significant advance over prior systems and
20 methods.

BRIEF DESCRIPTION OF THE DRAWINGS

FIGURE 1 illustrates a system that communicates telecommunication information between a telecommunication network and customer premises equipment using a DSL platform;

FIGURE 2 illustrates a system that communicates telecommunication information between a telecommunication network and customer premises equipment using a cable platform;

FIGURE 3 illustrates a system that communicates telecommunication information between a telecommunication network and customer premises equipment using a wireless platform;

FIGURE 4 illustrates a system that uses several, alternative telecommunication interfaces, data compression algorithms, data communication protocols, and data links to couple a telecommunication switch to DSL, cable, and wireless platforms;

FIGURE 5 illustrates a gateway that uses several, alternative telecommunication interfaces, data compression algorithms, data communication protocols, and data links to communicate telecommunication information;

FIGURE 6 illustrates a configuration of telecommunication interface modules, echo cancellation modules, compression modules, packetization modules, and network interface modules within a gateway;

FIGURE 7 illustrates a table of subscriber profiles relating to a gateway; and

FIGURES 8A, 8B, and 8C illustrate a flowchart of a method of communicating telecommunication information using several, alternative telecommunication interfaces, data compression algorithms, data communication protocols, and data links.

DETAILED DESCRIPTION OF THE DRAWINGS

FIGURE 1 illustrates a system 10 that communicates telecommunication information between a telecommunication network 12 and customer premises equipment 14 using a DSL platform. System 10 includes a switch 16, a gateway 18, a digital subscriber line access multiplexer (DSLAM) 20, integrated access devices (IADs) 22, and terminal devices 24a, 24b, and 24c (collectively, terminal devices 24). Using DSL technology, DSLAM 20 and IADs 22 deliver greater bandwidth over local loop circuits 30 than traditional plain old telephone service (POTS) and, thus, more efficiently communicate telecommunication information between telecommunication network 12 and customer premises equipment 14. To couple telecommunication network 12 to DSLAM 20, gateway 18 performs various compression and protocol conversions. Because gateway 18 supports several, alternative telecommunication, compression, and broadband technologies, it provides an integrated solution that is compatible with many different DSL platforms. As a result, telecommunication providers can deploy system 10 with greater flexibility and in a more cost-effective manner.

Telecommunication network 12 may be a public switched telephone network (PSTN), a private switched telephone network, or any other interconnected collection of telecommunication switches that provide local, regional, long distance, or international telephone service. Telecommunication information may include voice, data, image, video, or any other type of information that can be communicated using telecommunication network 12.

Telecommunication switch 16 communicates telecommunication information between telecommunication network 12 and gateway 18. Switch 16 may be a class 4 switch, a class 5 switch, or any other suitable device that communicates telecommunication information with telecommunication network 12.

Gateway 18 performs various compression and protocol conversions to communicate telecommunication information between switch 16 and DSLAM 20. To communicate telecommunication information with switch 16, gateway 18 uses GR-303, TR-8, signal system 7 (SS7), V5, integrated services digital network (ISDN) lines, unbundled analog lines, or any other suitable telecommunication interface 26.

To communicate telecommunication information with DSLAM 20, gateway 18 generates data packets according to Internet Protocol (IP), Asynchronous Transfer Mode (ATM), Frame Relay, or any other suitable data communication protocol and communicates the data packets with DSLAM 20 using DS-1 lines, DS-3 lines, OC-3 lines, Ethernet lines, or any other suitable data link 28. In addition, to facilitate efficient communication of telecommunication information over the DSL platform, gateway 18 may compress and de-compress telecommunication information using various compression algorithms. Gateway 18 also may selectively perform echo cancellation on the telecommunication information to isolate and filter unwanted signal reflections.

Gateway 18 uses subscriber profiles to support these alternative telecommunication, compression, and broadband technologies. Gateway 18 receives subscriber information indicating a combination of telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28 that gateway 18 should use in servicing either an individual subscriber or a group of subscribers. According to the received subscriber information, gateway 18 generates and stores a subscriber profile associating the individual subscriber or group of subscribers with the combination of telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28. Gateway 18 may receive the subscriber information from switch 16, IADs 22, or a management device 19. Management device 19 may be a network management system (NMS), a softswitch, or any other suitable device for managing the operation of gateway 18 and may communicate subscriber information to gateway 18 using either a wireline, wireless, or other suitable type of data link 21 or data network 32. In a particular embodiment, gateway 18 receives subscriber information relating to one of IADs 22, and in response, gateway 18 generates and stores a subscriber profile associating the subscribers serviced by IAD 22 with a combination of telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28 that gateway 18 should use in servicing those subscribers.

To communicate telecommunication information between switch 16 and DSLAM 20, gateway 18 identifies a subscriber associated with the

telecommunication information and communicates the telecommunication information according to the subscriber's stored profile. To communicate telecommunication information from switch 16 to DSLAM 20, gateway 18 receives telecommunication information from switch 16 using interface 26 associated with the subscriber, compresses the telecommunication information using the data compression algorithm associated with the subscriber, generates data packets encapsulating the telecommunication information according to the data communication protocol associated with the subscriber, and communicates the data packets to DSLAM 20 using data link 28 associated with the subscriber. To communicate telecommunication information from DSLAM 20 to switch 16, gateway 18 receives data packets from data link 28 associated with the subscriber, extracts telecommunication information from the data packets according to the data communication protocol associated with the subscriber, de-compresses the telecommunication information according to the data compression algorithm associated with the subscriber, and communicates the telecommunication information to switch 16 using interface 26 associated with the subscriber. By supporting several, alternative telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28, gateway 18 provides an integrated communication solution that is compatible with many different DSL platforms.

Although not illustrated in FIGURE 1, data switches, routers, or other data communication equipment may be coupled between gateway 18 and DSLAM 20. Using IP, ATM, Frame Relay, or any other suitable data communication protocol, the data communication equipment may communicate data packets between gateway 18 and DSLAM 20.

DSLAM 20 communicates data packets between gateway 18 and IADs 22 using DSL technology. DSLAM 20 receives data packets from gateway 18, processes the data packets to generate digital DSL data, and communicates the digital DSL data to IADs 22 using local loop circuits 30. DSLAM 20 also receives digital DSL data from IADs 22 using local loop circuits 30, identifies data packets for delivery to gateway 18, and communicates the data packets to gateway 18. Asymmetric DSL (ADSL), integrated DSL (IDSL), symmetric DSL (SDSL), high data rate DSL

(HDSL), rate-adaptive DSL (RADSL), very-high data rate DSL (VDSL), DSL-LITE, or other forms of DSL technology allow data transmissions over local loop circuits 30 at greater speeds than offered by traditional dial-up modems. As a result, by using DSL technology, system 10 may support broadband, telecommunication services over local loop circuits 30.

In a particular embodiment, DSLAM 20 also communicates data packets between data network 32 and IADs 22. Data network 32 may include a wide-area network (WAN), a local-area network (LAN), the Internet, or any other interconnected collection of switches, routers, or other data communication equipment that provides data services. DSLAM 20 receives data packets from data network 32, processes the data packets to generate digital DSL data, and communicates the digital DSL data to IADs 22 using local loop circuits 30. DSLAM 20 also receives digital DSL data from local loop circuits 30, identifies data packets for delivery to data network 32, and communicates the data packets to data network 32.

IADs 22 communicate telecommunication information between DSLAM 20 and terminal devices 24. IADs 22 receive digital DSL data from local loop circuits 30, identify data packets including telecommunication information for terminal devices 24, process the data packets to generate analog telephone signals, and communicate the analog telephone signals to terminal devices 24 using subscriber lines 34. IADs 22 also receive, from subscriber lines 34, analog telephone signals communicating telecommunication information from terminal devices 24. IADs 22 process the analog telephone signals to generate data packets including the telecommunication information, process the data packets to generate digital DSL data, and communicate the digital DSL data to DSLAM 20 using local loop circuits 30. Each subscriber line 34 may support one or more terminal devices 24 and may couple to terminal devices 24 using wireline, wireless, or any other suitable communication path. Terminal devices 24 may include telephones 24a, facsimile machines 24b, computers 24c, or any other suitable device that communicates telecommunication information using telecommunication network 12.

In a particular embodiment, IADs 22 also communicate data packets with LANs 36. IADs 22 receive digital DSL data from local loop circuits 30, identify data packets for delivery to LANs 36, and communicate the data packets to LANs 36. IADs 22 also receive data packets from LANs 36, process the data packets to generate digital DSL data, and communicate the digital DSL data to DSLAM 20 using local loop circuits 30.

Although FIGURE 1 illustrates switch 16, gateway 18, and DSLAM 20 as separate devices, the present invention contemplates that system 10 may include any combination of one or more devices at one or more locations that communicate telecommunication information between telecommunication network 12 and customer premises equipment 14 using a DSL platform. For example, in an alternative embodiment, a single device may perform the operations associated with gateway 18 and DSLAM 20.

FIGURE 2 illustrates a system 50 that communicates telecommunication information between telecommunication network 12 and customer premises equipment 14 using a cable platform. System 50 includes switch 16, gateway 18, a cable modem termination system (CMTS) 52, media terminal adapters (MTAs) 54, and terminal devices 24. System 50 operates in a similar manner as system 10, except instead of using DSLAM 20 and IADs 22 to communicate digital DSL data over local loop circuits 30, system 50 uses CMTS 52 and MTAs 54 to communicate data packets over cable links 56. CMTS 52 and MTAs 54 deliver greater bandwidth over cable link 56 than traditional plain old telephone service (POTS) offers over local link circuits 30. Thus, CMTS 52 and MTAs 54 provide a more efficient means of communicating telecommunication information between telecommunication network 12 and customer premises equipment 14. To couple telecommunication network 12 to CMTS 52, gateway 18 performs various compression and protocol conversions. Because gateway 18 supports several, alternative telecommunication, compression, and broadband technologies, gateway 18 is compatible with many different cable platforms. As a result, telecommunication providers can deploy system 50 with greater flexibility and in a more cost-effective manner.

Gateway 18 performs various compression and protocol conversions to communicate telecommunication information between switch 16 and CMTS 52. To communicate telecommunication information with switch 16, gateway 18 uses GR-303, TR-8, SS7, V5, ISDN lines, unbundled analog lines, or any other suitable telecommunication interface 26. To communicate telecommunication information with CMTS 52, gateway 18 generates data packets according to IP, ATM, Frame Relay, or any other suitable data communication protocol and communicates the data packets with CMTS 52 using DS-1 lines, DS-3 lines, OC-3 lines, Ethernet lines, or other suitable data link 28. In addition, to facilitate efficient communication of telecommunication information over the cable platform, gateway 18 may compress and de-compress telecommunication information using various compression algorithms. Gateway 18 also may selectively perform echo cancellation on the telecommunication information to isolate and filter unwanted signal reflections.

Gateway 18 uses subscriber profiles to support these alternative telecommunication, compression, and broadband technologies. Gateway 18 receives subscriber information indicating a combination of telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28 that gateway 18 should use in servicing either an individual subscriber or a group of subscribers. According to the received subscriber information, gateway 18 generates and stores a subscriber profile associating the individual subscriber or group of subscribers with the combination of telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28. Gateway 18 may receive the subscriber information from switch 16, MTAs 54, or a management device 19. Management device 19 may be a network management system (NMS), a softswitch, or any other suitable device for managing the operation of gateway 18 and may communicate subscriber information to gateway 18 using either a wireline, wireless, or other suitable type of data link 21 or data network 32. In a particular embodiment, gateway 18 receives subscriber information relating to one of MTAs 54, and in response, gateway 18 generates and stores a subscriber profile associating the subscribers serviced by MTA 54 with a combination of

telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28 that gateway 18 should use in servicing those subscribers.

To communicate telecommunication information between switch 16 and CMTS 52, gateway 18 identifies a subscriber associated with the telecommunication information and communicates the telecommunication information according to the subscriber's stored profile. To communicate telecommunication information from switch 16 to CMTS 52, gateway 18 receives telecommunication information from switch 16 using interface 26 associated with the subscriber, compresses the telecommunication information using the data compression algorithm associated with the subscriber, generates data packets encapsulating the telecommunication information according to the data communication protocol associated with the subscriber, and communicates the data packets to CMTS 52 using data link 28 associated with the subscriber. To communicate telecommunication information from CMTS 52 to switch 16, gateway 18 receives data packets from data link 28 associated with the subscriber, extracts telecommunication information from the data packets according to the data communication protocol associated with the subscriber, decompresses the telecommunication information according to the data compression algorithm associated with the subscriber, and communicates the telecommunication information to switch 16 using interface 26 associated with the subscriber. By supporting several, alternative telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28, gateway 18 provides an integrated communication solution that is compatible with many different cable platform.

Although not illustrated in FIGURE 2, data switches, routers, or other data communication equipment may be coupled between gateway 18 and CMTS 52. Using IP, ATM, Frame Relay, or any other suitable data communication protocol, the data communication equipment may communicate data packets between gateway 18 and CMTS 52.

CMTS 52 communicates data packets between gateway 18 and MTAs 54. CMTS 52 receives data packets from gateway 18, processes the data packets for communication over cable link 56, and communicates the data packets to MTAs 54

using cable link 56. CMTS 52 also receives data packets from MTAs 54 using cable link 56, identifies data packets for delivery to gateway 18, and communicates the data packets to gateway 18. CMTS 52 and MTAs 54 communicate data over cable link 56 at greater speeds than offered by traditional dial-up modems. As a result, system 50 may support broadband, telecommunication services over cable link 56.

In a particular embodiment, CMTS 52 also communicates data packets between data network 32 and MTAs 54. CMTS 52 receives data packets from data network 32, processes the data packets for communication over cable link 56, and communicates the data packets to MTAs 54 using cable link 56. CMTS 52 also receives data packets from cable link 56, identifies data packets for delivery to data network 32, and communicates the data packets to data network 32.

MTAs 54 communicate telecommunication information between CMTS 52 and terminal devices 24. MTAs 54 receive data packets from cable link 56, identify data packets including telecommunication information for terminal devices 24, process the data packets to generate analog telephone signals, and communicate the analog telephone signals to terminal devices 24 using subscriber lines 34. MTAs 54 also receive, from subscriber lines 34, analog telephone signals communicating telecommunication information from terminal devices 24. MTAs 54 process the analog telephone signals to generate data packets including the telecommunication information, processes the data packets for communication over cable link 56, and communicate the data packets to CMTS 52 using cable link 56. Each subscriber line 34 may support one or more terminal devices 24 and may couple to terminal devices 24 using wireline, wireless, or any other suitable communication path.

In a particular embodiment, MTAs 54 also communicate data packets with LANs 36. MTAs 54 receive data packets from cable link 56 for delivery to LANs 36 and communicate the data packets to LANs 36. MTAs 54 also receive data packets from LANs 36 for delivery to CMTS 52 and communicate the data packets to CMTS 52 using data link 56.

Although FIGURE 2 illustrates switch 16, gateway 18, and CMTS 52 as separate devices, the present invention contemplates that system 50 may include any combination of one or more devices at one or more locations that communicate

telecommunication information between telecommunication network 12 and customer premises equipment 14 using a cable platform. For example, in an alternative embodiment, a single device may perform the operations associated with gateway 18 and CMTS 52.

5 FIGURE 3 illustrates a system 70 that communicates telecommunication information between telecommunication network 12 and customer premises equipment 14 using a wireless platform. System 70 includes switch 16, gateway 18, a base station controller (BSC) 72, wireless network interface units (WNIUs) 74, and terminal devices 24. In contrast to system 10 (which communicates telecommunication information over local loop circuits 30 using DSLAM 20 and IADs 22) and system 50 (which communicates telecommunication information over cable link 56 using CMTS 52 and MTAs 54), system 70 uses BSC 72 and WNIUs 74 to communicate telecommunication information over wireless links 76. BSC 72 and WNIUs 74 deliver greater bandwidth over wireless links 76 than traditional plain old telephone service (POTS) offers over local link circuits 30. Thus, BSC 72 and WNIUs 74 provide a more efficient means of communicating telecommunication information between telecommunication network 12 and customer premises equipment 14. To couple telecommunication network 12 to BSC 72, gateway 18 performs various compression and protocol conversions. Because gateway 18 supports several, alternative telecommunication, compression, and broadband technologies, gateway 18 is compatible with many different wireless platforms. As a result, telecommunication providers can deploy system 70 with greater flexibility and in a more cost-effective manner.

 Gateway 18 performs various compression and protocol conversions to communicate telecommunication information between switch 16 and BSC 72. To communicate telecommunication information with switch 16, gateway 18 uses GR-303, TR-8, SS7, V5, ISDN lines, unbundled analog lines, or any other suitable telecommunication interface 26. To communicate telecommunication information with BSC 72, gateway 18 generates data packets according to IP, ATM, Frame Relay, or any other suitable data communication protocol and communicates the data packets with BSC 72 using DS-1 lines, DS-3 lines, OC-3 lines, Ethernet lines, or other

suitable data link 28. In addition, to facilitate efficient communication of telecommunication information over the wireless platform, gateway 18 may compress and de-compress telecommunication information using various compression algorithms. Gateway 18 also may selectively perform echo cancellation on the telecommunication information to isolate and filter unwanted signal reflections.

Gateway 18 uses subscriber profiles to support these alternative telecommunication, compression, and broadband technologies. Gateway 18 receives subscriber information indicating a combination of telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28 that gateway 18 should use in servicing either an individual subscriber or a group of subscribers. According to the received subscriber information, gateway 18 generates and stores a subscriber profile associating the individual subscriber or group of subscribers with the combination of telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28. Gateway 18 may receive the subscriber information from switch 16, WNIUs 74, or a management device 19. Management device 19 may be a network management system (NMS), a softswitch, or any other suitable device for managing the operation of gateway 18 and may communicate the subscriber information to gateway 18 using either a wireline, wireless, or other suitable type of data link 21 or data network 32. In a particular embodiment, gateway 18 receives subscriber information relating to one of WNIUs 74, and in response, gateway 18 generates and stores a subscriber profile associating the subscribers serviced by WNIU 74 with a combination of telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28 that gateway 18 should use in servicing those subscribers.

To communicate telecommunication information between switch 16 and BSC 72, gateway 18 identifies a subscriber associated with the telecommunication information and communicates the telecommunication information according to the subscriber's stored profile. To communicate telecommunication information from switch 16 to BSC 72, gateway 18 receives telecommunication information from switch 16 using interface 26 associated with the subscriber, compresses the telecommunication information using the data compression algorithm associated with

the subscriber, generates data packets encapsulating the telecommunication information according to the data communication protocol associated with the subscriber, and communicates the data packets to BSC 72 using data link 28 associated with the subscriber. To communicate telecommunication information from BSC 72 to switch 16, gateway 18 receives data packets from data link 28 associated with the subscriber, extracts telecommunication information from the data packets according to the data communication protocol associated with the subscriber, decompresses the telecommunication information according to the data compression algorithm associated with the subscriber, and communicates the telecommunication information to switch 16 using interface 26 associated with the subscriber. By supporting several, alternative telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28, gateway 18 provides an integrated communication solution that is compatible with many different wireless platform.

Although not illustrated in FIGURE 3, data switches, routers, or other data communication equipment may be coupled between gateway 18 and BSC 72. Using IP, ATM, Frame Relay, or any other suitable data communication protocol, the data communication equipment may communicate data packets between gateway 18 and BSC 72.

BSC 72 communicates data packets between gateway 18 and WNIUs 74. BSC 72 receives data packets from gateway 18, processes the data packets for wireless communication, and communicates the data packets to WNIUs 74 using wireless links 76. BSC 72 also receives data packets from WNIU 74 using wireless links 76, identifies data packets for delivery to gateway 18, and communicates the data packets to gateway 18. BSC 72 and WNIUs 74 communicate data packets over wireless links 76 at greater speeds than offered by traditional dial-up modems. As a result, system 70 may support broadband, telecommunication services over wireless links 76.

In a particular embodiment, BSC 72 also communicates data packets between data network 32 and WNIUs 74. BSC 72 receives data packets from data network 32, processes the data packets for wireless communication, and communicates the data

packets to WNIUs 74 using wireless links 76. BSC 72 also receives data packets from WNIUs 74 using wireless links 76, identifies data packets for delivery to data network 32, and communicates the data packets to data network 32.

WNIUs 74 communicate telecommunication information between BSC 72 and terminal devices 24. WNIUs 74 receive data packets from wireless links 76, identify data packets including telecommunication information for terminal devices 24, process the data packets to generate analog telephone signals, and communicate the analog telephone signals to terminal devices 24 using subscriber lines 34. WNIUs 74 also receive, from subscriber lines 34, analog telephone signals communicating telecommunication information from terminal devices 24. WNIUs 74 process the analog telephone signals to generate data packets including the telecommunication information, process the data packets for wireless communication, and communicate the data packets to BSC 72 using wireless links 76. Each subscriber line may support one or more terminal devices 24 and may couple to terminal devices 24 using wireline, wireless, or any other suitable communication path.

In a particular embodiment, WNIUs 74 also communicate data packets with LANs 36. WNIUs 74 receive data packets from wireless links 76, identify data packets for delivery to LANs 36, and communicate the data packets to LANs 36. WNIUs 74 also receive data packets from LANs 36, process the data packets for wireless communication, and communicate the data packets to BSC 72 using wireless link 76.

Although FIGURE 3 illustrates switch 16, gateway 18, and BSC 72 as separate devices, the present invention contemplates that system 70 may include any combination of one or more devices at one or more locations that communicate telecommunication information between telecommunication network 12 and customer premises equipment 14 using a wireless platform. For example, in an alternative embodiment, a single device may perform the operations associated with gateway 18 and BSC 72.

Although FIGURES 1-3 illustrate DSL, cable, and wireless platforms, the present invention contemplates that gateway 18 may also couple telecommunication network 12 to any other suitable broadband platform.

FIGURE 4 illustrates system 90 that uses several, alternative telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28 to couple a telecommunication switch 16 to DSL, cable, and wireless platforms. System 90 includes switch 16, gateway 18, DSLAMs 20, CMTs 52, and BSCs 72. To communicate telecommunication information over the DSL, cable, and wireless platforms, gateway 18 performs various compression and protocol conversions to couple switch 16 to DSLAMs 20, CMTs 52, and BSCs 72. Gateway 18 supports several, alternative telecommunication, compression, and broadband technologies so that it is compatible with many different switches 16, access networks 92, DSLAMs 20, CMTs 52, and BSCs 72.

Gateway 18 communicates telecommunication information with switch 16 using several, alternative telecommunication interfaces 26. Unbundled analog lines 26a communicate telecommunication information using analog signals. Each analog line 26a communicates a separate call. In contrast, GR-303 interface 26b, TR-8 interface 26c, and SS7 interface 26a are concentrated, digital interfaces that can communicate more than one call over a single line. Although FIGURE 4 illustrates analog lines 26a, GR-303 interface 26b, TR-8 interface 26c, and SS7 interface 26d, gateway 18 may communicate telecommunication information with switch 16 using any suitable telecommunication interface 26. For example, in an alternative embodiment, gateway 18 may communicate telecommunication information with switch 16 using V5 or ISDN lines.

Gateway 18 compresses and de-compresses telecommunication information using several, alternative compression algorithms. To facilitate efficient communication of data packets over DSL, cable, and wireless platforms, gateway 18 may compress and de-compress telecommunication information using G.711, G.723, G.728, G.729, or any other suitable compression algorithm. Gateway 18 receives telecommunication information from switch 16, compresses the telecommunication information using several, alternative compression algorithms, and communicates the compressed telecommunication information to DSLAMs 20, CMTs 52, and BSCs 72. Gateway 18 also receives compressed telecommunication information from DSLAMs 20, CMTs 52, and BSCs 72, de-compresses the telecommunication

information using several, alternative compression algorithms, and communicates the de-compressed telecommunication information to switch 16.

Gateway 18 communicates telecommunication information with DSLAMs 20, CMTSs 52, and BSCs 72 using several, alternative data communication protocols.

5 Gateway 18 receives telecommunication information from switch 16, generates data packets encapsulating the telecommunication information according to several, alternative data communication protocols, and communicates the data packets to DSLAMs 20, CMTSs 52, and BSCs 72. Gateway 18 also receives data packets from DSLAMs 20, CMTSs 52, and BSCs 72. Gateway 18 extracts telecommunication
10 information from the data packets according to several, alternative data communication protocols, and communicates the telecommunication information to switch 16.

By supporting several, alternative data communication protocols, gateway 18 may communicate telecommunication information with DSLAM 20, CMTSs 52, and
15 BSCs 72 using an IP network 92a, an ATM network 92b, or a Frame Relay network 92c (collectively, access networks 92). Access networks 92 may include any suitable combination of data switches, routers, or other data communication equipment that communicates data packets using a data communication protocol. Although FIGURE 4 illustrates IP, ATM, and frame relay networks 92, gateway 18 may use any suitable
20 data communication protocol and corresponding network 92 to communicate data packets with DSLAMs 20, CMTSs 52, and BSCs 72.

In a particular embodiment, gateway 18 sets priority bits in a subscriber's data packets according to the subscriber's assigned quality of service. If a subscriber is assigned a high quality of service, gateway 18 sets the priority bits in the subscriber's
25 data packets so that the packets receive a high priority in communication to customer premises equipment 14. If a subscriber is assigned a low quality of service, gateway 18 sets the priority bits in the subscriber's data packets so that the packet receives a low priority in communication to customer premises equipment 14.

Gateway 18 communicates data packets using several, alternative data links
30 28. Although FIGURE 4 illustrates DS-1 lines 28a, DS-3 lines 28b, and OC-3 lines 28c, gateway 18 may communicate data packets using any other suitable data link 28.

For example, in an alternative embodiment, gateway 18 communicates data packets using 10 Mbps, 100 Mbps, 1000 Mbps, or any other suitable version of Ethernet over coaxial, twisted-pair, fiber, or other suitable type of cable. As described above, data links 28 may couple gateway 18 directly to DSLAMs 20, CMTs 52, and BSCs 72, or data links 28 may couple gateway 18 to data switches, routers, or any other suitable data communication equipment that communicates data packets with DSLAMs 20, CMTs 52, and BSCs 72.

Gateway 18 uses subscriber profiles to properly employ the alternative telecommunication, compression, and broadband technologies. A subscriber profile may associate an individual subscriber or a group of subscribers with a combination of telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28. For example, in a particular embodiment, a profile may associate the subscribers serviced by each IAD 22, MTA 54, or WNIU 74 as a group with a telecommunication interface 26, a data compression algorithm, a data communication protocol, and a data link 28. The subscriber profiles may also indicate each subscriber's assigned quality of service and whether gateway 18 should perform echo cancellation on each subscriber's telecommunication information.

When gateway 18 receives telecommunication information from switch 16, gateway 18 identifies a subscriber associated with the telecommunication information and communicates the telecommunication information to DSLAM 20, CMTs 52, or BSC 72 according to the subscriber's stored profile. If the profile indicates that gateway 18 should perform echo cancellation on the telecommunication information, gateway 18 performs echo cancellation on the telecommunication information. Gateway 18 also compresses the telecommunication information using a compression algorithm indicated in the subscriber profile, generates data packets encapsulating the telecommunication information according to a data communication protocol indicated in the subscriber profile, and communicates the data packets to data link 28 indicated in the subscriber profile. In a particular embodiment, gateway 18 sets priority bits in the subscriber's data packets according to the quality of service indicated in the subscriber's stored profile.

In a particular embodiment, each subscriber is associated with one of interfaces 26, and gateway 18 identifies a subscriber associated with telecommunication information according to interface 26 from which gateway 18 receives the telecommunication information. For example, each subscriber may be associated with one of unbundled analog lines 26a. When gateway 18 receives telecommunication information from one of analog lines 26a, gateway 18 identifies a subscriber associated with analog line 26a and communicates the telecommunication information according to the subscriber's profile. Similarly, each subscriber may be associated with a time slot in GR-303 interface 26b, TR-8 interface 26c, or SS7 interface 26d. When gateway 18 receives telecommunication information from a time slot in GR-303 interface 26b, TR-8, interface 26c, or SS7 interface 26d, gateway 18 identifies a subscriber associated with the time slot and communicates the telecommunication information according to the subscriber's profile.

In an alternative embodiment, gateway 18 receives a subscriber identifier with telecommunication information from switch 16, identifies a subscriber associated with the telecommunication information using the subscriber identifier, and then communicates the telecommunication information according to the subscriber's stored profile. The subscriber identifier may be a name, address, telephone number, or any other suitable subscriber information associated with subscribers serviced by gateway 18.

When gateway 18 receives a data packet from DSLAM 20, CMTS 52, or BSC 72, gateway 18 extracts telecommunication information from the data packet, identifies a subscriber associated with the telecommunication information, and communicates the telecommunication information to switch 16 according to the subscriber's profile. Gateway 18 de-compresses the telecommunication information using a compression algorithm indicated in the subscriber profile, selectively performs echo cancellation on the telecommunication information as indicated in the subscriber profile, and communicates the telecommunication information to switch 16 using interface 26 indicated in the subscriber profile. In a particular embodiment, gateway 18 associates subscriber profiles with data network addresses, and gateway 18 identifies a subscriber associated with telecommunication information according to

a source or destination address of the data packet. In an alternative embodiment, the data packet includes a name, address, telephone number, or other subscriber identifier that gateway 18 uses to identify a subscriber associated with the telecommunication information.

5 Because gateway 18 supports several, alternative telecommunication, compression, and broadband technologies, it provides an integrated solution that is compatible with many different DSL, cable, wireless or other broadband platforms. As a result telecommunication providers can deploy system 90 with greater flexibility and in a more cost effective manner.

10 FIGURE 5 illustrates a gateway 18 that uses several, alternative telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28 to communicate telecommunication information. Gateway 18 includes management module 100, memory 102, telecommunication interface modules (TIMs) 104, echo cancellation modules 106, compression modules
15 108, packetization modules 110, and network interface modules 112. Management module 100, TIMs 104, echo cancellation modules 106, compression modules 108, packetization modules 110, and network interface modules 112 represent functional elements that are reasonably self-contained so that each can be designed, constructed, and updated substantially independent of the others. In a particular embodiment,
20 management module 100, TIMs 104, echo cancellation modules 106, compression modules 108, packetization modules 110, and network interface modules 112 are implemented on separate printed circuit boards that may be coupled to a backplane in gateway 18.

25 In the illustrated embodiment, a time division multiplexing (TDM) bus 114, a data packet bus 118, and a control bus 120 communicate telecommunication information, data packets, and control information within gateway 18. TDM bus 114 communicates several streams of telecommunication information among TIMs 104, echo cancellation modules 106, compression modules 108, and packetization modules
30 110. A clock signal 116 divides TDM bus 114 into a fixed sequence of time slots, and each stream of telecommunication information is assigned a different time slot in the sequence. In a particular embodiment, management module 100 assigns 64

kilobits per second (kb/s) time slots to each subscriber serviced by gateway 18 and stores subscriber profiles associating the assigned time slots with the subscribers in memory 102. Management module 100 may provision TDM bus 114 at start-up of gateway 18 to support fixed time slot assignments or during operation of gateway 18 to support dynamic time slot assignments. Data packet bus 118 communicates data packets between packetization modules 110 and network interface modules 112, and control bus 120 communicates control information between management module 100 and TIMs 104, echo cancellation modules 106, compression modules 108, packetization modules 110, and network interface modules 112.

Although the particular embodiment of gateway 18 described with reference to FIGURE 5 includes three different busses 114, 118, and 120, gateway 18 may use any combination of dedicated or shared communication paths to communicate telecommunication information, data packets, and control information among modules 100, 104, 106, 108, 110, and 112. For example, in an alternative embodiment, an IEEE 802.6 bus communicates telecommunication information between TIMs 104, echo cancellation modules 106, compression modules 108, and packetization modules 110 and also communicates data packets between packetization modules 110 and network interface modules 112. In another alternative embodiment, gateway 18 may perform a combination of echo cancellation, compression, and packetization without requiring any bus transfer between different modules.

Using subscriber profiles stored in memory 102, management module 100 manages the operation of gateway 18 to ensure that each subscriber's telecommunication information is handled using the proper telecommunication, compression, and broadband technologies. Management module 100 receives subscriber information indicating a combination of telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28 that gateway 18 should use in servicing either an individual subscriber or a group of subscribers. The subscriber information may also indicate a subscriber's assigned quality of service and whether gateway 18 should perform echo cancellation on the subscriber's telecommunication information. Gateway 18 generates and stores

subscriber profiles in memory 102 according to the received subscriber information. Management module may receive the subscriber information from management device 19, switch 16, IADs 22, MTAs 54, or WNIUs 74. To control the operation of gateway 18, management module 100 communicates control information to TIMs 104, echo cancellation modules 106, compression modules 108, packetization modules 110, and network interface modules 112. Although memory 102 appears internal to gateway 18 in FIGURE 5, memory 102 may be internal to or external from gateway 18 according to particular needs.

TIMs 104 communicate telecommunication information with switch 16 using several, alternative interfaces 26. Each TIM 104 may communicate telecommunication information using either a single type of interface 26 or several, different types of interfaces 26. During configuration, TIMs 104 receive control information identifying subscribers' interfaces 26 and assigned time slots in TDM bus 114. Once configured, TIMs 104 receive telecommunication information from subscribers associated interfaces 26, process the telecommunication information for communication using TDM bus 114, and communicate the telecommunication information to the subscribers' assigned time slots in TDM bus 114. TIMs 104 also receive telecommunication information from subscribers' time slots in TDM bus 114, process the telecommunication information according to the subscribers' corresponding interfaces 26, and communicate the telecommunication information to switch 16 using the subscribers' corresponding interfaces 26.

In a particular embodiment, one of TIMs 104 communicates analog telephone signals with switch 16 using unbundled analog lines 26a. In such an embodiment, TIM 104 receives analog telephone signals communicating telecommunication information from switch 16, processes the analog telephone signals to generate digital telecommunication information, and communicates the digital telecommunication information to TDM bus 114. TIM 104 also receives digital telecommunication information from TDM bus 114, generates analog telephone signals for communicating the telecommunication information, and communicates the analog telephone signals to switch 16 using unbundled analog lines 26a. In an alternative embodiment, TIMs 104 communicates digital telecommunication information with

switch 16 using GR-303, TR-8, SS7, V5, ISDN lines, or other suitable digital interfaces 26.

Echo cancellation modules 106 selectively perform echo cancellation on telecommunication information to isolate and filter unwanted signal reflections. During configuration, echo cancellation modules 106 receive, from management module 100, control information identifying telecommunication information on which echo cancellation modules 106 should perform echo cancellation. In a particular embodiment, the control information identifies subscribers' assigned time slots in TDM bus 114. Once configured, echo cancellation modules 106 receive telecommunication information from TDM bus 114, perform echo cancellation on the telecommunication information, and communicate the telecommunication information back to TDM bus 114. Echo cancellation modules 106 also may selectively perform varying lengths of echo cancellation, based on the control information received from management module 100.

Compression modules 108 compress and de-compress telecommunication information using several, alternative compression algorithms. During configuration, compression modules 108 receive, from management module 100, control information identifying telecommunication information that compression modules 108 should compress or de-compress. In a particular embodiment, the control information identifies subscribers' assigned time slots in TDM bus 114. Once configured, compression modules 108 receive telecommunication information from TIMs 104 or echo cancellation modules 106 using TDM bus 114, compress the telecommunication information using the subscribers' associated compression algorithms, and communicate the compressed telecommunication information to packetization modules 110 using TDM bus 114. Compression modules 108 also receive compressed telecommunication information from packetization modules 110 using TDM bus 114, de-compress the telecommunication information using the subscribers' associated compression algorithms, and communicate the de-compressed telecommunication information to TIMs 104 or echo cancellation modules 106 using TDM bus 114.

Compression modules 108 may compress and de-compress telecommunication information using G.711, G.722, G.723, G.728, G.729, or any other suitable compression algorithm. In a particular embodiment, each compression module 108 supports a separate compression algorithm. In an alternative embodiment, each compression module 108 supports several, different compression algorithms, and each compression module 108 compresses or de-compresses a subscriber's telecommunication information using a compression algorithm selected according to control information received from management module 100.

Packetization modules 110 process subscribers' telecommunication information according to several, alternative data communication protocols. During configuration, packetization modules 110 receive, from management module 100, control information identifying subscribers' assigned time slots in TDM bus 114, data addresses, or other suitable identifiers. Once configured, packetization modules 110 receive telecommunication information from TDM bus 114 using subscribers' assigned time slot. Packetization modules 110 may receive either compressed telecommunication information from compression modules 108 or uncompressed telecommunication information from TIMs 104 or echo cancellation modules 106. Packetization modules 110 encapsulate the telecommunication information in data packets according to the subscribers' associated data communication protocols, assign the data packets the subscribers' destination addresses, and communicate the data packets to network interface modules 112. In a particular embodiment, packetization modules 110 set priority bits in the subscribers' data packets according to the subscribers' assigned quality of service. Packetization modules 110 also receive data packets from network interface modules 112. Packetization modules 110 extract telecommunication information from the data packets, identify subscribers associated with the telecommunication information, and communicate the telecommunication information to TDM bus 114 using the subscribers' assigned time slot in TDM bus 114. As described above, packetization modules 110 may identify the subscribers based on the source or destination addresses of the data packets or subscriber identifiers included in the data packets.

Packetization modules 110 may employ IP, ATM, frame relay, or any other suitable data communication protocol to generate and process data packets. In a particular embodiment, each packetization module 110 supports a separate data communication protocol. In an alternative embodiment, each packetization module 110 supports several, alternative data communication protocols, and each packetization module 110 communicates a subscriber's telecommunication information using a protocol selected according to control information received from management module 100.

Network interface modules 112 communicate data packets between packetization modules 110 and data links 28. Network interface modules 112 may be coupled to DS-1 lines, DS-3 lines, OC-3 lines, Ethernet lines, or any other suitable data links 28. Network interface modules 112 receive subscriber's data packets from packetization modules 110 and communicate the data packets to subscriber's associated data links 28. Network interface modules 112 also receive data packets from data links 28 and communicate the data packets to packetization modules 110. In a particular embodiment, each network interface module 112 supports a single data link 28. In an alternative embodiment, each network interface module 112 supports several, alternative data links 28, and network interface modules 112 communicate data packets to data links 28 selected according to either the data packets' destination address or control information received from management module 100.

In a first mode of operation, management module 100 configures gateway 18 at start-up. According to the subscriber profiles stored in memory 102, management module 100 selects a combination of TIMs 104, echo cancellation modules 106, compression modules 108, packetization modules 110, and network interface modules 112 to service each subscriber. Management module 100 then establishes a communication path for each subscriber among the selected combination of TIMs 104, echo cancellation modules 106, compression modules 108, packetization modules 110, and network interface modules 112. In the illustrated embodiment, management module 110 assigns each subscriber one or more time slots in TDM bus 114 for communicating telecommunication information among TIMs 104, echo cancellation modules 106, compression modules 108, and packetization modules 110.

To implement the configuration, management module 100 communicates control information to TIMs 104, echo cancellation modules 106, compression modules 108, packetization modules 110, and network interface modules 112.

5 In a second mode of operation, management module 100 dynamically configures gateway 18 in response to receiving telecommunication information from switch 16 or customer premises 14. When gateway 18 receives telecommunication information, management module 100 identifies a subscriber associated with the telecommunication information and then configures gateway 18 to process and communicate the telecommunication information according to the subscriber's stored
10 profile. Management module 100 selects a combination of TIMs 104, echo cancellation modules 106, compression modules 108, packetization modules 110, and network interface modules 112 to process the telecommunication information and then establishes a communication path among the selected combination of TIMs 104, echo cancellation modules 106, compression modules 108, packetization modules
15 110, and network interface modules 112.

In a particular embodiment, the subscriber profiles indicate a telecommunication interface 26, a compression algorithm, a data communication protocol, and a data link 28 associated with each subscriber. To configure gateway 18, management module 100 selects, for each subscriber, TIM 104 coupled to
20 associated interface 26, compression module 108 that supports the associated compression algorithm, packetization module 110 that supports the associated data communication protocol, and network interface module 112 coupled to associated data link 18. In addition, if a subscriber profile indicates that gateway 18 should perform echo cancellation on a subscriber's telecommunication information,
25 management module 100 selects one of echo cancellation modules 106 to service the subscriber.

Although the particular embodiment of gateway 18 described in detail with reference to FIGURE 5 includes management module 100, memory 102, TIMs 104, echo cancellation modules 106, compression modules 108, packetization modules
30 110, and network interface modules 112, gateway 18 may include any combination of hardware, software, or hardware and software that communicates telecommunication

information using several, alternative telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28. For example, in an alternative embodiment, a single module may perform a combination of echo cancellation, compression, and packetization.

5 FIGURE 6 illustrates a configuration 150 of telecommunication interface modules 104, echo cancellation modules 106, compression modules 108, packetization modules 110, and network interface modules 112. Using configuration 150, gateway 18 may communicate telecommunication information using several
10 alternative telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28. As illustrated, each telecommunication interface module 104 supports a separate type of interface 26, each compression module 108 supports a separate compression algorithm, each packetization module 110 supports a separate data communication protocol, and each network interface module 112 supports a separate data link 28.

15 To ensure that gateway 18 processes and communicates each subscriber's telecommunication information using the proper communication, compression, and broadband technologies, management module 100 selects a combination of TIMs 104, echo cancellation modules 106, compression modules 108, packetization modules 110, and network interface modules 112 to service each subscriber according to the
20 subscriber profiles stored in memory 102. In a particular embodiment, the subscriber profiles identify a telecommunication interface 26, a compression algorithm, a data communication protocol, and a data link 28 associated with each subscriber. To service each subscriber, management module 100 selects TIM 104 coupled to associated interface 26, compression module 108 that supports the associated
25 compression algorithm, packetization module 110 that supports the associated data communication protocol, and network interface module 112 coupled to associated data link 18. In addition, if a subscriber profile indicates that the gateway 18 should perform echo cancellation on a subscriber's telecommunication information, management module 100 selects one of echo cancellation modules 106 to service the
30 subscriber. In an alternative embodiment, the subscriber profiles identify a combination of TIMs 104, echo cancellation modules 106, compression modules 108,

packetization modules 110, and network interface modules 112 to service each subscriber.

Although the particular embodiment illustrated in FIGURE 6 includes TIMs 104, echo cancellation modules 106, compression modules 108, packetization modules 110, and network interface modules 112 that use particular telecommunication, compression, and broadband technologies, gateway 18 may include any combination of TIMs 104, echo cancellation modules 106, compression modules 108, packetization modules 110, and network interface modules 112 that use any number of alternative telecommunication, compression, and broadband technologies.

FIGURE 7 illustrates a table 200 of subscriber profiles relating to gateway 18. Management module 100 stores the subscriber profiles in memory 102 using arrays, linked lists, pointers, or any other suitable data programming techniques. Because gateway 18 supports several, alternative interfaces 26, compression algorithms, data communication protocols, and data links 28, gateway 18 uses the subscriber profiles to process and communicate each subscriber's telecommunication information using the proper telecommunication, compression, and broadband technologies.

Column 202 identifies the subscribers serviced by gateway 18. Although the subscriber identifiers in column 202 are telephone numbers, gateway 18 may use names, addresses, telephone numbers, or any other suitable information to identify subscribers. Columns 204, 208, 210, and 212 associate each subscriber with one of interfaces 26, a compression algorithm, a data communication protocol, and one of data links 28, respectively. Column 206 indicates whether gateway 18 should perform echo cancellation on each subscriber's telecommunication information, and column 211 indicates each subscriber's assigned quality of service. Column 214 includes the subscribers' assigned time slots in TDM bus 114. Although table 200 includes only one time slot per subscriber, gateway 18 may assign each subscriber several time slots in alternative embodiments. Column 216 indicates a data network address for each subscriber's data packets, and column 218 indicates the type of platform communicating each subscriber's data packets. Column 220 lists the subscribers' names.

Management module 100 uses the subscriber profiles in table 200 to configure gateway 18. Using the subscriber profiles, management module 100 selects a combination of TIMs 104, echo cancellation modules 106, compression modules 108, packetization modules 110, and network interface modules 112 to service each subscriber. For each subscriber, management module 100 selects TIM 104 coupled to the subscriber's associated interface 26 in column 204, compression module 108 that supports the subscriber's associated compression algorithm in column 208, packetization module 110 that supports the subscriber's associated data communication protocol in column 210, and network interface module 112 coupled to the subscriber's associated data link 18 in column 212. In addition, if column 206 indicates that gateway 18 should perform echo cancellation on a subscriber's telecommunication information, management module 100 selects one of echo cancellation modules 106 to service the subscriber. As indicated in column 214, management module 100 also assigns each subscriber one or more time slots in TDM bus 114 for communicating telecommunication information among TIM 104, echo cancellation module 106, compression module 108, and packetization module 110. After configuration, gateway 18 processes and communicates subscribers' telecommunication information according the subscriber profiles.

To communicate telecommunication information from switch 16 to customer premises 14, one of TIMs 104 receives telecommunication information from switch 16 and identifies a subscriber associated with the telecommunication information. In a particular embodiment, TIM 104 identifies the subscriber based on interface 26 from which TIM 104 received the telecommunication information. For example, if TIM 104 receives telecommunication information from analog line #165, TIM 104 can identify Jane Doe as the subscriber associated with the telecommunication information using column 204. In an alternative embodiment, TIM 104 receives a subscriber identifier in conjunction with the telecommunication information and uses column 202 to identify the subscriber associated with the telecommunication information. After identifying the subscriber, TIM 104 communicates the telecommunication information to TDM bus 114 using the subscriber's assigned time slot in column 214.

If column 206 indicates that gateway 18 should perform echo cancellation on the subscriber's telecommunication information, one of echo cancellation modules 106 receives the telecommunication information from TDM bus 114 using the subscriber's assigned time slot in column 214, performs echo cancellation on the telecommunication information, and communicates the telecommunication information back to the subscriber's assigned time slot in column 214.

If column 208 includes a compression algorithm associated with the subscriber, then one of compression modules 108 receives the telecommunication information from TDM bus 114 using the subscriber's assigned time slot in column 214, compresses the telecommunication information using the compression algorithm indicated in column 208, and communicates the compressed telecommunication information back to the subscriber's assigned time slot in column 214.

One of packetization modules 110 receives the telecommunication information from TDM bus 114 using the subscriber's assigned time slot in column 214. Packetization module 110 then generates data packets encapsulating the telecommunication information according to the data communication protocol indicated in column 210, assigns the data packets the subscriber's data network address indicated in column 216, and communicates the data packets to one of network interface modules 112 using data packet bus 118. In a particular embodiment, packetization module 110 sets priority bits in the data packets according to the subscriber's assigned quality of service in column 211. Network interface module 112 receives the data packets and communicates the data packets to the subscriber's data link 28 indicated in column 212.

To communicate telecommunication information from customer premises 14 to switch 16, one of network interface modules 112 receives data packets from DSLAM 20, CMTS 52, or BSC 72. Network interface module 112 communicates the data packets to one of packetization modules 110 using data packet bus 118. Packetization module 110 extracts telecommunication information from the data packets and identifies a subscriber associated with the telecommunication information. In a particular embodiment, packetization module 110 uses the data packets' destination or source address to identify the subscriber according to column

216. In an alternative embodiment, packetization module 110 uses a subscriber identifier included in the data packets to identify the subscriber according to column 202. After identifying the subscriber, packetization module 110 communicates the telecommunication information to TDM bus 114 using the subscriber's assigned time slot in column 214. If column 208 includes a compression algorithm associated with the subscriber, then one of compression modules 108 receives the telecommunication information from TDM bus 114 using the subscriber's assigned time slot in column 214, de-compresses the telecommunication information using the compression algorithm indicated in column 208, and communicates the de-compressed telecommunication information back to the subscriber's assigned time slot in column 214. One of TIMs 104 receives the telecommunication information from TDM bus 114 using the subscriber's assigned time slot in column 214 and communicates the telecommunication to switch 16 using interface 26 in column 204.

Although a particular type of subscriber profile is described with reference to FIGURE 7, gateway 18 may operate using many, alternative types of subscriber profiles. In addition, gateway 18 may use the subscriber profiles in many alternative ways. For example, in a particular embodiment, TIMs 104, echo cancellation modules 106, compression modules 108, packetization modules 110, and network interface modules 112 directly access the subscriber profiles stored in memory 102. In an alternative embodiment, management module 100 accesses the subscriber profiles and communicates control information to TIMs 104, echo cancellation modules 106, compression modules 108, packetization modules 110, and network interface modules 112 according to the subscriber profiles.

FIGURES 8A, 8B, and 8C illustrate a flowchart of a method of communicating telecommunication information using several, alternative telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28. The method begins at step 300, where management module 100 receives subscriber information. The subscriber information indicates combinations of telecommunication interfaces 26, data compression algorithms, data communication protocols, and data links 28 that gateway 18 should use in servicing either individual subscribers or groups of subscribers. In a particular embodiment, the

Once configured, gateway 18 communicates telecommunication information between switch 16 and customer premises equipment 14. If one of TIMs 104 receives telecommunication information from switch 16 at step 308, the method continues by simultaneously or in series, as appropriate, performing steps 346-380. If one of network interface modules 112 receives a data packet including telecommunication information from DSLAM 20, CMTS 52, BSC 72, or other broadband data communication device at step 310, the method continues by simultaneously or in series, as appropriate, performing steps 312-344.

Using steps 312-344, gateway 18 communicates telecommunication information from a DSL, cable, wireless, or other type of broadband platform to switch 16. Network interface module 112 receives a data packet from one of data links 28 at step 312 and communicates the data packet to one of packetization modules 110 at step 314. Packetization module 110 extracts telecommunication information from the data packet at step 316 and processes the telecommunication information for communication over TDM bus 114 at step 318. At step 320, packetization module 110 identifies the subscriber associated with the telecommunication information based on the data packet's source or destination

address or a subscriber identifier encapsulated in the data packet. Packetization module 110 communicates the telecommunication information to TDM bus 114 using the subscriber's assigned time slot at step 322.

5 If the subscriber's profile includes an associated compression algorithm at step 324, one of compression modules 108 receives the telecommunication information from the subscriber's assigned time slot in TDM bus 114 at step 326. Compression module 108 de-compresses the telecommunication information using the subscriber's associated compression algorithm at step 328 and communicates the de-compressed telecommunication information to TDM bus 114 using the subscriber's assigned time slot at step 330.

10 If the subscriber's profile indicates that gateway 18 should perform echo cancellation on the subscriber's telecommunication information at step 332, one of echo cancellation modules 106 receives the telecommunication information from the subscriber's assigned time slot in TDM bus 114 at step 334. Echo cancellation module 106 performs echo cancellation on the telecommunication information to isolate and filter unwanted signal reflections at step 336 and communicates the telecommunication information to TDM bus 114 using the subscriber's assigned time slot at step 338.

15 One of TIMs 104 receives the telecommunication information from the subscriber's assigned time slot in TDM bus 114 at step 340. TIM 104 processes the telecommunication information for communication using the subscriber's associated interface 26 at step 342 and communicates the telecommunication information to switch 16 using the subscriber's associated interface 26 at step 344. After steps 312-344, the method continues at step 308.

20 Using steps 346-380, gateway 18 communicates telecommunication information from switch 16 to a DSL, cable, wireless, or other suitable type of broadband platform. At step 346, one of TIMs 104 receives telecommunication information from one of interfaces 26. TIM 104 processes the telecommunication information for communication over TDM bus 114 at step 348 and identifies the subscriber associated with the telecommunication information at step 350. In a particular embodiment, TIM 104 receives the telecommunication information from

066303.0163-112800

one of unbundled analog lines 26a, and TIM 104 identifies the subscriber associated with unbundled analog line 26a as the intended recipient of the telecommunication information. In an alternative embodiment, TIM 104 receives the telecommunication information from a GR-303, TR-8, SS7, V5, ISDN, or other suitable digital interface 26, and TIM 104 identifies the subscriber that is the intended recipient of the telecommunication information according to a subscriber identifier received from switch 16. After identifying the subscriber, TIM 104 communicates the telecommunication information to TDM bus 114 using the subscriber's assigned time slot at step 352.

If the subscriber's profile indicates that gateway 18 should perform echo cancellation on the subscriber's telecommunication information at step 354, one of echo cancellation modules 106 receives the telecommunication information from the subscriber's assigned time slot in TDM bus 114 at step 356. Echo cancellation module 106 performs echo cancellation on the telecommunication information to isolate and filter unwanted signal reflections at step 358 and communicates the telecommunication information to TDM bus 114 using the subscriber's assigned time slot at step 360.

If the subscriber's profile includes an associated compression algorithm at step 362, one of compression modules 108 receives the telecommunication information from the subscriber's assigned time slot in TDM bus 114 at step 364. Compression module 108 compresses the telecommunication information using the subscriber's associated compression algorithm at step 366 and communicates the compressed telecommunication information to TDM bus 114 using the subscriber's assigned time slot at step 368.

One of packetization modules 110 receives the telecommunication information from the subscriber's assigned time slot in TDM bus 114 at step 370. Packetization module 110 generates data packets encapsulating the telecommunication information according to the subscriber's associated data communication protocol at step 372. Packetization module 110 assigns the data packets the subscriber's data network address at step 374 and communicates the data packets to one of network interface modules 112 at step 376.

Network interface module 112 processes the data packets for communication over the subscriber's associated data link 28 at step 378 and communicates the data packets to data link 28 at step 380. After steps 346-380, the method returns to step 308.

5

Although an embodiment of the invention and its advantages are described in detail, a person skilled in the art could make various alterations, additions, and omissions without departing from the spirit and scope of the present invention as defined by the appended claims..

066303.0163

WHAT IS CLAIMED IS:

1. A gateway for communicating telecommunication information, comprising:

5 one or more packetization modules operable to receive first data packets from a first broadband network using a first data communications protocol and to extract first telecommunication information associated with a first subscriber from the first data packets, the packetization modules further operable to receive second data packets from a second broadband network using a second data communication
10 protocol and to extract second telecommunication information associated with a second subscriber from the second data packets; and

one or more telecommunication interface modules operable to communicate the first telecommunication information to a telecommunication network using a first telecommunication interface associated with the first subscriber and to communicate
15 the second telecommunication information to the telecommunication network using a second telecommunication interface associated with the second subscriber.

2. The gateway of Claim 1, wherein the packetization modules are further operable to identify the first subscriber associated with the first telecommunication
20 information according to a data network address of the first data packets.

3. The gateway of Claim 1, wherein the data packet modules are further operable to identify the first subscriber associated with the first telecommunication information according to a subscriber identifier included in the first data packets.
25

4. The gateway of Claim 3, wherein the subscriber identifier is a name, address, or telephone number.

066303.0163

5

10

15

20

25

10. The gateway of Claim 1, further comprising:

a data packet bus operable to communicate the first data packets to a packetization module supporting the first data communication protocol; and

5 a time division multiplexing (TDM) bus operable to communicate the first telecommunication information to a telecommunication interface module coupled to the first telecommunication interface.

10 11. The gateway of Claim 1, further comprising an IEEE 802.6 bus operable to communicate the first data packets to a packetization module supporting the first data communication protocol and to communicate the first telecommunication information to a telecommunication interface module coupled to the first telecommunication interface.

15 12. The gateway of Claim 1, further comprising one or more echo cancellation modules operable to perform echo cancellation on the first telecommunication information but not the second telecommunication information

09724603.118000

13. A method for communicating telecommunication information, comprising:

receiving first data packets from a first broadband network using a first data communication protocol;

5 extracting first telecommunication information associated with a first subscriber from the first data packets;

communicating the first telecommunication information to a telecommunication network using a first interface associated with the first subscriber;

10 receiving second data packets from a second broadband network using a second data communication protocol;

extracting second telecommunication information associated with a second subscriber from the second data packets; and

15 communicating the second telecommunication information to the telecommunication network using a second interface associated with the second subscriber.

14. The method of Claim 13, further comprising:

associating each of a plurality of subscribers with a data network address; and

20 identifying the first subscriber associated with the first telecommunication information according a data network address of the first data packets.

15. The method of Claim 13, further comprising identifying the first subscriber associated with the first telecommunication information according to a subscriber identifier included in the first data packets.

25

16. The method of Claim 15, wherein the subscriber identifier is a name, address, or telephone number.

00774503-11600

17. The method of Claim 13, further comprising:

de-compressing the first telecommunication information using a first
compression algorithm associated with the first subscriber; and

5 de-compressing the second telecommunication information using a second
compression algorithm associated with the second subscriber.

18. The method of Claim 17, further comprising:

storing a first subscriber profile associating the first subscriber with the first
telecommunication interface and the first compression algorithm; and

10 storing a second subscriber profile associating the second subscriber with the
second telecommunication interface and the second compression algorithm.

19. The method of Claim 17, further comprising:

15 selecting a first compression module supporting the first compression
algorithm for de-compressing the first subscriber's telecommunication information;
and

selecting a second compression module supporting the second compression
algorithm for de-compressing the second subscriber's telecommunication information.

20 20. The method of Claim 13, further comprising assigning one or more
time slots in a time division multiplexing (TDM) bus to communicate the first
telecommunication information to a telecommunication interface module coupled to
the first telecommunication interface.

21. The method of Claim 13, further comprising:

25 receiving the first data packets from a digital subscriber line multiplexer
(DSLAM); and

receiving the second data packets from a cable modem termination system
(CMTS) or a base station controller (BSC).

30

22. The method of Claim 13, further comprising:
communicating the first data packets to a packetization module supporting the
first data communication protocol using a data packet bus; and
communicating the first telecommunication information to a
5 telecommunication interface module coupled to the first telecommunication interface
using a time division multiplexing (TDM) bus.

23. The method of Claim 13, further comprising:
communicating the first data packets to a packetization module supporting the
10 first data communication protocol using an IEEE 802.6 bus; and
communicating the first telecommunication information to a
telecommunication interface module coupled to the first telecommunication interface
using the IEEE 802.6 bus.

24. The method of Claim 13, further comprising:
performing echo cancellation on the first telecommunication information; and
bypassing echo cancellation for the second telecommunication information.

25. The method of Claim 13, further comprising:
20 communicating the first data packets from an integrated access device (IAD)
to a digital subscriber line access multiplexer (DSLAM) using a digital subscriber
line;

communicating the first data packets from the DSLAM to the first broadband
network using the first data communication protocol;

25 communicating the second data packets from a media terminal adapter (MTA)
to a cable modem termination system (CMTS) using a cable link; and

communicating the second data packets from the CMTS to the second
broadband network using the second data communication protocol.

26. The method of Claim 13, further comprising:
communicating the first data packets from an integrated access device (IAD)
to a digital subscriber line access multiplexer (DSLAM) using a digital subscriber
line;

5 communicating the first data packets from the DSLAM to the first broadband
network using the first data communication protocol;

communicating the second data packets from a wireless network interface unit
(WNIU) to a base station controller (BSC) using a wireless link; and

10 communicating the second data packets from the BSC to the second
broadband network using the second data communication protocol.

27. The method of Claim 13, further comprising:

communicating the first data packets from a media terminal adapter (MTA) to
a cable modem termination system (CMTS) using a cable link;

15 communicating the first data packets from the CMTS to the first broadband
network using the first data communication protocol;

communicating the second data packets from a wireless network interface unit
(WNIU) to a base station controller (BSC) using a wireless link; and

20 communicating the second data packets from the BSC to the second
broadband network using the second data communication protocol.

000011" 20942260

28. A system for communicating telecommunication information, comprising:

a memory operable to store subscriber profiles associating each of a plurality of subscribers with a telecommunication interface;

5 a packetization module operable to receive data packets from a broadband network and to extract telecommunication information associated with a subscriber from the data packets using a data communication protocol associated with the subscriber; and

10 a telecommunication interface module operable to communicate the telecommunication information to a telecommunication network using a telecommunication interface associated with the subscriber.

29. The system of Claim 28, wherein:

15 the subscriber profiles associate each of the subscribers with a data network address; and

the packetization module is further operable to identify the subscriber associated with the telecommunication information according to a data network address of the data packets.

20 30. The system of Claim 28, wherein the packetization module is further operable to identify the subscriber associated with the telecommunication information according to a subscriber identifier included in the data packets.

25 31. The system of Claim 30, wherein the subscriber identifier is a name, address, or telephone number.

066303.0163

32. The system of Claim 28, further comprising:

a compression module operable to de-compress the telecommunication information using a compression algorithm associated with the subscriber; and

5 wherein the subscriber profiles associate each of the subscribers with a compression algorithm.

33. The system of Claim 28, further comprising a management module operable to select a compression module for de-compressing the telecommunication information according to a compression algorithm associated with the subscriber.

10

34. The system of Claim 28, further comprising a management module operable to assign one or more time slots in a time division multiplexing (TDM) bus to communicate the telecommunication information to the telecommunication interface module.

15

35. The system of Claim 28, further comprising:

a data packet bus coupled to the packetization module and operable to communicate the data packets to the packetization module; and

20 a time division multiplexing (TDM) bus coupled to the packetization module and operable to communicate the telecommunication information from the packetization module using one or more time slots.

36. The system of Claim 28, further comprising an IEEE 802.6 bus coupled to the packetization module and operable to communicate the data packets to the packetization module and to communicate the telecommunication information from packetization module.

25

09754307.112000

37. The system of Claim 28, further comprising an echo cancellation module operable to perform echo cancellation on the telecommunication information according to whether the subscriber's profile indicates that the echo cancellation module should perform echo cancellation on the subscriber's telecommunication information.

5

066303.0163

38. A method for communicating telecommunication information, comprising:

associating each of a plurality of subscribers with a telecommunication interface;

5 receiving data packets from a broadband network and extracting telecommunication information associated with a subscriber from the data packets using a data communication protocol associated with the subscriber; and

communicating the telecommunication information to a telecommunication network using a telecommunication interface associated with the subscriber.

10

39. The method of Claim 38, further comprising:

associating each of the subscribers with a data network address; and

identifying the subscriber associated with the telecommunication information according to a data network address of the data packets.

15

40. The method of Claim 38, further comprising identifying the subscriber associated with the telecommunication information according to a subscriber identifier included in the data packets.

20

41. The method of Claim 40, wherein the subscriber identifier is a name, address, or telephone number.

42. The method of Claim 38, further comprising:

associating each of the subscribers with a compression algorithm; and

25

de-compressing the telecommunication information using a compression algorithm associated with the subscriber.

43. The method of Claim 38, further comprising selecting a compression module for de-compressing the telecommunication information according to a compression algorithm associated with the subscriber.

30

5

10

15

20

25

performing echo cancellation on the telecommunication information according to the subscriber's stored profile.

SYSTEM AND METHOD FOR COMMUNICATING
TELECOMMUNICATION INFORMATION FROM A BROADBAND NETWORK
TO A TELECOMMUNICATION NETWORK


ABSTRACT OF THE DISCLOSURE


A system for communicating telecommunication information includes a memory, packetization modules, and a telecommunication interface module. The memory stores subscriber profiles associating each of several subscribers with a telecommunication interface. The packetization modules receive data packets from a broadband network and extract telecommunication information associated with a subscriber from the data packets. The telecommunication interface module communicates the telecommunication information to a telecommunication network using a telecommunication interface associated with the subscriber.


5

10

09724603.112800

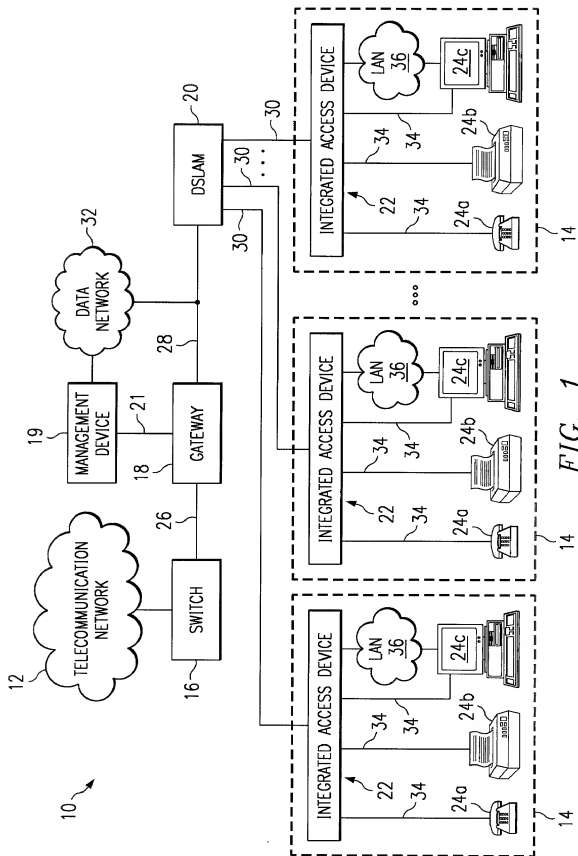

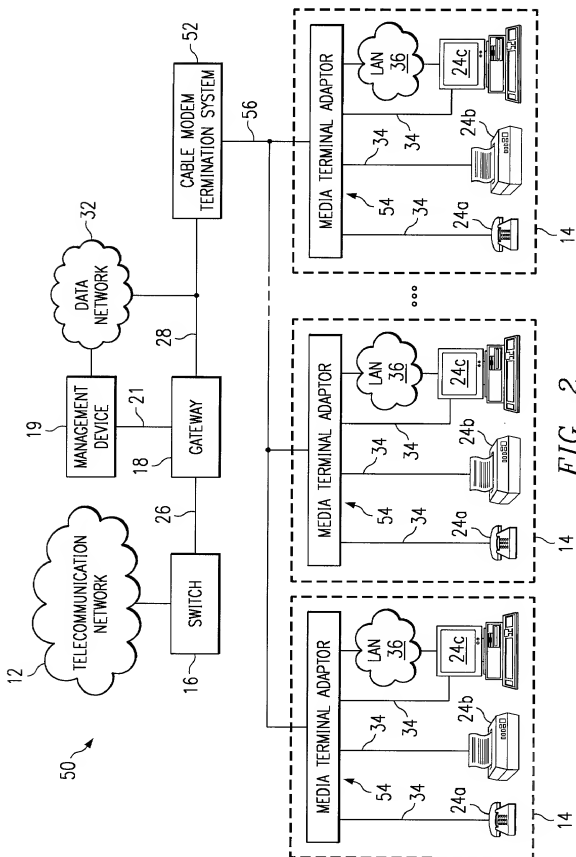



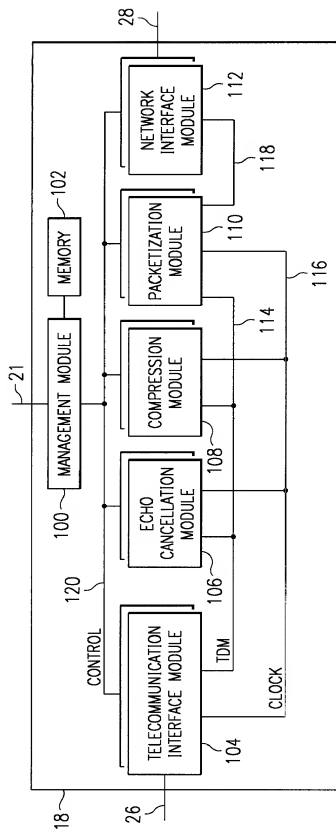


FIG. 5

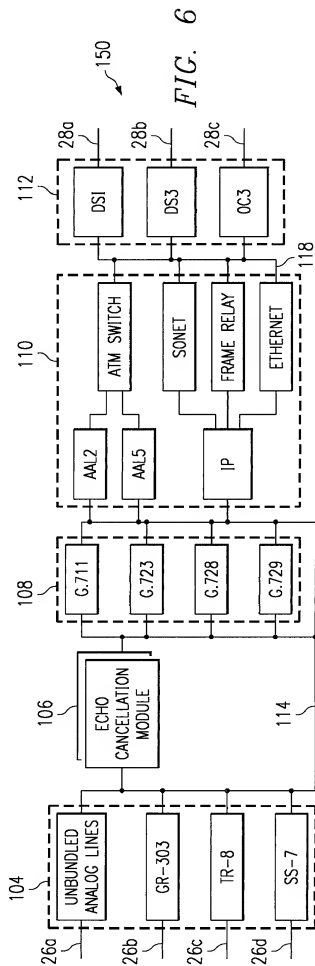
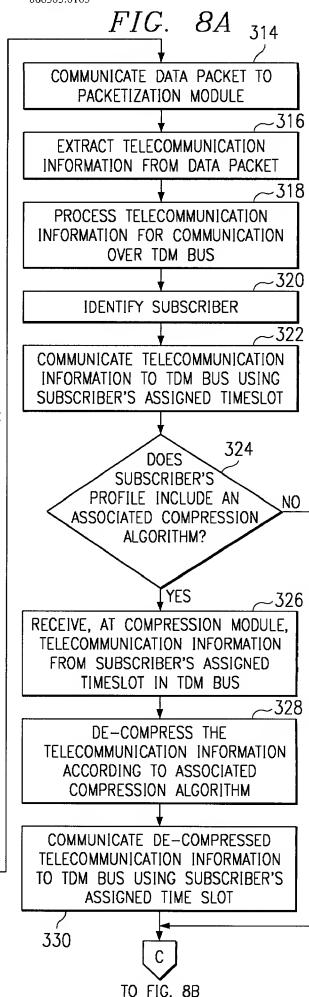
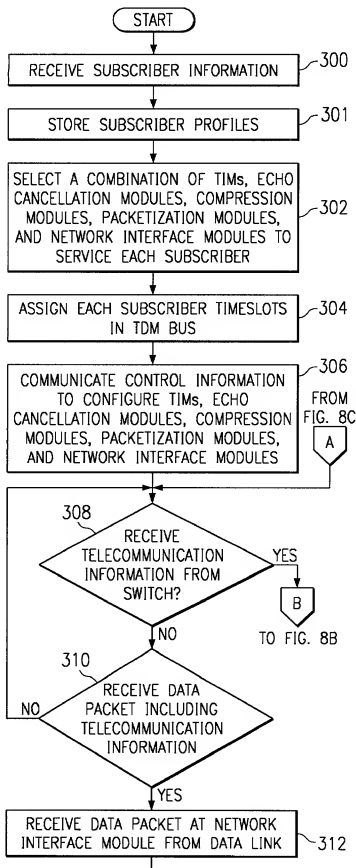


FIG. 6

008211* 2094260

200 202 SUBSCRIBER IDENTIFIER	204 INTERFACE	206 ECHO CANCELLATION	208 COMPRESSION	210 DATA COMMUNICATION PROTOCOL	211 QUALITY OF SERVICE	212 DATA LINK	214 TIME SLOT	216 ADDRESS	218 PLATFORM	220 NAME
111-111-1111	GR-303	YES	G.711	IP	1	OC-3 #4	5	15.89.75.46	DSL	JOHN DOE
333-333-3333		NO	G.723	FRAME RELAY	0	DS-1 #3	9	94	CABLE	JANE DOE
	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮	⋮
888-888-8888	SS7	YES	G.728	ATM	2	DS-3 #7	21	65	WIRELESS	JEREMY DOE

FIG. 7





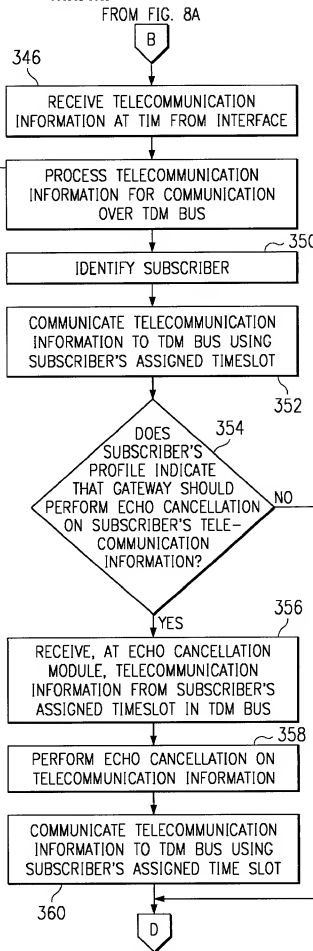


FIG. 8B

000211-00042760

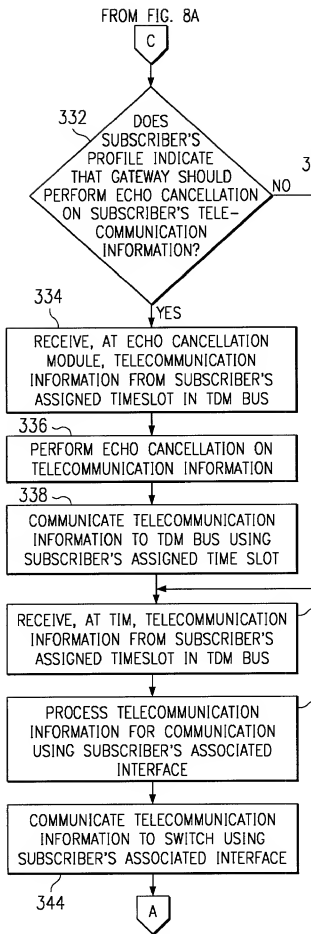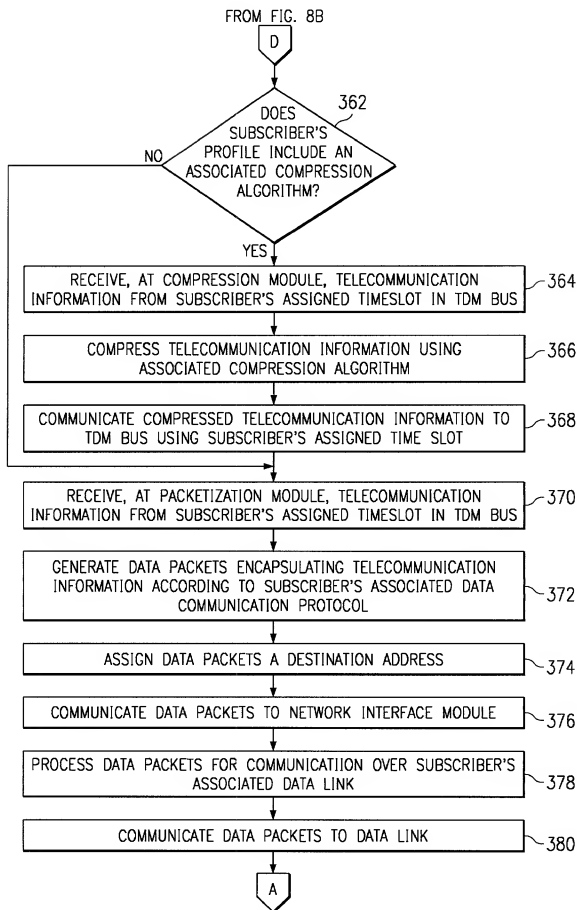

TO FIG. 8A

FIG. 8C

066303 0163 113800

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name; that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention or design entitled **SYSTEM AND METHOD FOR COMMUNICATING TELECOMMUNICATION INFORMATION FROM A BROADBAND NETWORK TO A TELECOMMUNICATION NETWORK**, the specification which is attached hereto; that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; and that I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Number</u>	<u>Country</u>	<u>Date Filed</u>	<u>Priority Claimed</u> (Yes) (No)
N/A			

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

<u>Application Serial Number</u>	<u>Date Filed</u>	<u>Status</u>
N/A		

I hereby appoint:

Jerry W. Mills	Reg. No. 23,005
Robert M. Chiaviello, Jr.	Reg. No. 32,461
Ann C. Livingston	Reg. No. 32,479
Thomas R. Felger	Reg. No. 28,842
Charles S. Fish	Reg. No. 35,870
Kevin J. Meek	Reg. No. 33,738
T. Murray Smith	Reg. No. 30,222
Barton E. Showalter	Reg. No. 38,302
David G. Wille	Reg. No. 38,363
Bradley P. Williams	Reg. No. 40,227
Terry J. Stalford	Reg. No. 39,522
Christopher W. Kennerly	Reg. No. 40,675
Harold E. Meier	Reg. No. 22,428
Douglas M. Kubehl	Reg. No. 41,915
Samir A. Bhavsar	Reg. No. 41,617
Thomas R. Nesbitt, Jr.	Reg. No. 22,075
James J. Maune	Reg. No. 26,946
Roger J. Fulghum	Reg. No. 39,678
Scott F. Partridge	Reg. No. 28,142
James B. Arpin	Reg. No. 33,470
Jay B. Johnson	Reg. No. 38,193
Robert W. Holland	Reg. No. 40,020
James L. Baudino	Reg. No. 43,486
Tara D. Knapp	Reg. No. 43,723
William R. Borchers	Reg. No. 44,549
Brian W. Oaks	Reg. No. 44,981
Luke K. Pedersen	Reg. No. 45,003
Matthew B. Talpis	Reg. No. 45,152
David M. Doyle	Reg. No. 43,596
Keiko Ichiye	Reg. No. 45,460
Jeffery D. Baxter	Reg. No. 45,560
Thomas A. Beaton	Reg. No. 46,543
Kurt M. Pankratz	Reg. No. 46,977
Brian E. Szymczak	Reg. No. 47,120
Thomas J. Frame	Reg. No. 47,232

Patent Agents:

Brian A. Dietzel	Reg. No. 44,656
Kevin R. Imes	Reg. No. 44,795

all of the firm of Baker Botts L.L.P., my attorneys/agents with full power of substitution and revocation, to prosecute this application and to transact all business in the United States Patent and Trademark Office connected therewith, and to file and prosecute any international patent applications filed thereon before any international authorities.

Send Correspondence To:

Baker Botts L.L.P.
2001 Ross Avenue
Dallas, Texas 75201-2980

Direct Telephone Calls To:


Barton E. Showalter
at (214) 953-6509
Atty. Docket No. 066303.0163

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of first joint inventor

A. J. Paul Carew

Inventor's signature



Date

November 16, 2000

Residence (City, County, State)

Austin, Travis County, Texas

Citizenship

United Kingdom


Post Office Address

4518 Bull Creek Road
Austin, Texas 78731

Full name of second joint inventor, if any

Brendon W. Mills

Inventor's signature



Date

11-20-00

Residence (City, County, State)

Austin, Travis County, Texas

Citizenship

United States of America

Post Office Address

8213 Crabtree Drive
Austin, Texas 78750